

42' Majestic Mountain Pine Commercial Tree


SKU: T-42-C7

Features

- Commercial Grade
- Grow the tree year after year by adding more frames
- C7 LED Retro Fit Bulbs with C7 Empty Socket Line
- 2' high strength steel concentric stacking frames.
- Innovative nesting design for compact storage when not in use
- Tree can be assembled with basic hand tools, no previous experience required.
- Lifetime technical and assembly phone support
- Natural lifelike appearance
- Crush resistant, UV-protected high-strength needles

Material Specs

Lighting:	C7 LED Retro Fit Bulbs
Number of LEDs:	10,308
Available Colors:	Warm White, Cool White and Multi
LED Effect:	Steady
Electrical Draw:	150.325 Amps
Height:	42'
Diameter:	17' (without foliage) or 23' (with foliage)
Total Tree Tips:	149,650
Number of Branches:	
3' Regular Branch	419
6' Top Branch	6
5' Topper:	1
Weight:	
3' Regular Branch	10.7 lbs
6' Top Branch	9.16 lbs
5' Topper:	40lbs
Branch Box Size:	45" X 22" X 18"
Frame:	A-P Frames, 5' Pole and 5' Topper
Branches on Last Frame:	48
Construction Type:	Powder-coated frame designed for demanding outdoor applications
Steel Rings:	1" x .065 sq steel tubing ASTM A513
Electrical Harness:	14-gauge double strand wire with thermo jacketed 3 prong plugs
Number of Harness Outlets:	428
Shipping Weight:	5,920 lbs
Shipping:	Full Truck Load
Recommended Topper Size:	6' Topper

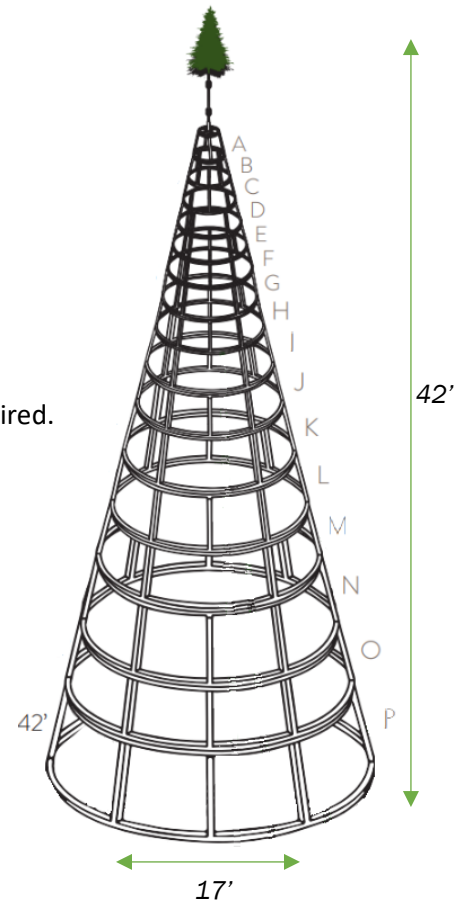

Hardware Specs

M10-1.5X100mm Bolt:	Quantity 428
M10-1.5 Nut:	Quantity 428
M10X22mm Washer:	Quantity 856
M10 Plate (30mmX80mm):	Quantity 162

Anchor Recommendation

***Highly recommend working with a professional installer for trees 42 feet and above.**

Electrical Diagram

- One 80 ft. extension cord for top 20 ft. of the tree (to E ring)
- One 40 ft. extension cord for 22 ft. to 26 ft. (to H ring)
- One 40 ft. extension cord for 28 ft. to 30 ft. (to J ring)
- One 40 ft. extension cord for 32 ft. to 34 ft. (to L ring)
- One 40 ft. extension cord to for 36 ft. to 38 ft. (to N ring)
- One 40 ft. extension cord for 40 ft. (O ring)
- One 40 ft. extension cord for 42 ft. (P ring)
- Extension cords should be dropped to the ground inside of the tree

