

30' Majestic Mountain Pine Commercial Tree


SKU: T-30-5MM

Features

- Commercial Grade
- Grow the tree year after year by adding more frames
- 5mm Wide Angle Conical LED Warm White
- 2' high strength steel concentric stacking frames.
- Innovative nesting design for compact storage when not in use
- Tree can be assembled with basic hand tools, no previous experience required
- Lifetime technical and assembly phone support
- Natural lifelike appearance
- Crush resistant, UV-protected high-strength needles

Material Specs

Lighting:	5mm Wide Angle Conical
Number of LEDs:	18,650
Available Colors:	Warm White, Pure White and Multi
LED Effect:	Steady
Electrical Draw:	15.57 Amps
Height:	30'
Diameter:	11' (without foliage) or 17' (with foliage)
Total Tree Tips:	64,114
Number of Branches:	
3' Regular Branch	176
6' Top Branch	6
5' Topper:	1
Weight:	
3' Regular Branch	10.7 lbs
6' Top Branch	9.16 lbs
5' Topper:	40lbs
Branch Box Size:	45" X 22" X 18"
Frame:	A-J Frames, 5' Pole and 5' Topper
Branches on Last Frame:	30
Construction Type:	Powder-coated frame designed for demanding outdoor applications
Steel Rings:	1" x .065 sq steel tubing ASTM A513
Electrical Harness:	14-gauge double strand wire with thermo jacketed 3 prong plugs
Number of Harness Outlets:	181
Shipping Weight:	2,520 lbs
Shipping:	Full Truck Load
Recommended Topper Size:	4' – 5' Topper (if you plan on growing the tree, 5' is recommended)

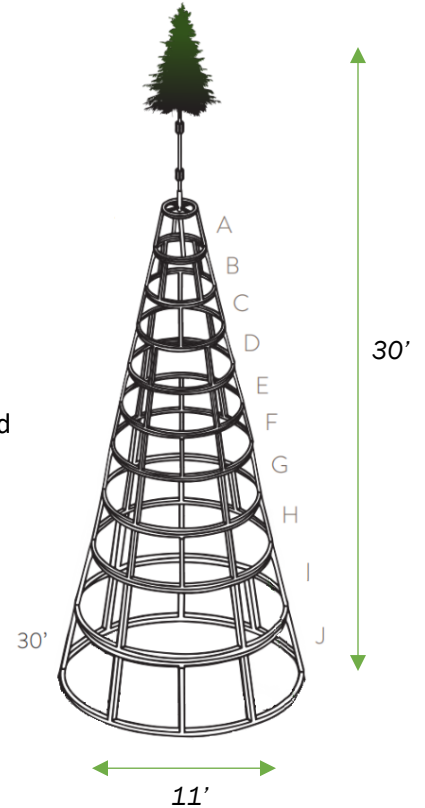

Hardware Specs

M10-1.5X100mm Bolt:	Quantity 188
M10-1.5 Nut:	Quantity 188
M10X22mm Washer:	Quantity 376
M10 Plate (30mmX80mm):	Quantity 72

Anchor Recommendation

- Water Barrel System (165 gallons)
- Block Weight (1380 lbs)
- Steel Plates (1380 lbs)

***Please refer to installation guide for further information**

Electrical Diagram

- One 80 ft. extension cord for the top 28 feet of the tree (to I ring)
- One 40 ft. extension cord for 30 ft. (to J ring)
- Extension cords should be dropped to the ground inside of the tree

***Please note: The tree top section should plug into two separate female plugs. Do not plug in all 9 strands to one outlet.**

